

DECLARATION OF PERFORMANCE MPH FIBER PLUS 60

Nº: EP0312-60-CPR2012/09/07

1. Product type Unique identification code of the product-type:	MPH Fiber Plus
2. Type batch or serial number or any other element allowing identification of the construction product as required under Article 11 (4):	60 (batch nr. See packaging)
3. Intended use or uses of the construction product, in accordance with the applicable harmonized technical specification, as foreseen by the manufacturer:	Polymer fibers for structural use in concrete, mortar and grout Clase II In accordance with the Annex ZA of Table ZA.1
4. Name, registered trade name or registered trade mark and contact address of the manufacturer as required under Article 11(5)	Myphor Materiales Especiales S.L. C/ Arte, 25 1º D 28033 Madrid - España
5. Contact Address: Where applicable, name and contact address of the authorized representative whose mandate covers the tasks specified in Article 12(2):	Not relevant (refer to item 4)
6. AVCP: System or systems of assessment and verification of constancy of performance (AVCP) of the construction product as set out in CPR, Annex V:	System 1
7. Notified body (hEN): In case of declaration of performance (DoP) concerning a construction product covered by harmonized standard:	BUREAU VERITAS Certification, Notified Body Number 1035 Certification of conformity of the factory production control on the basis of: Initial inspection of the manufacturing plant and factory production control Monitoring and continuous evaluation and approval of the factory production control Certificate number 1035-CPD-ES024048-B
8. Notified body (ETA): In case of declaration of performance concerning a construction product for which a European Technical Assessment (ETA) has been issued:	Not relevant (refer to item 7)

9. Declared performance

Essential characteristics	Performance	Harmonized technical specification
Length	60 mm	EN 14889-2:2006
Equivalent diameter	0,92 mm	
Ratio thickness/length	65,22	
Traction Strength	560 N/mm ²	
Modulus of Elasticity	20,5 kN/mm ²	
Melting Point and Flash Point	NPD	
Dosage	7 kg/m ³ to achieve residual flexural strength results above 1,5 MPa for 0,5 mm CMOD and 1 MPa for 3,5 mm CMOD	
Consistency	Vebe Time 9.0 s	

MyPHor Materiales Especiales, S.L.

Domicilio Social: c/ Cardenal Marcelo Spínola, 48. 1º A
28016 Madrid
Tel.: 91 766 39 34
Fax: 91 766 39 34

Oficina: c/ Arte, 25. 1º D
28033 Madrid
Tel.: 91 768 49 38 – 91 768 49 40
Fax: 91 384 46 18

10. Declaration

The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 9. This declaration of performance (DoP) is issued under the sole responsibility of the manufacturer identified in point 4.


Signed for and on behalf of the manufacturer by:

Madrid, July 1st 2013

Enrique Pina Mateo
Technical Director

MyPHor
materiales especiales s.l.
C/ Arte, 25. 1º D
28033 - MADRID
B-83937383

Gabriel Sémelas Ledesma
General Director

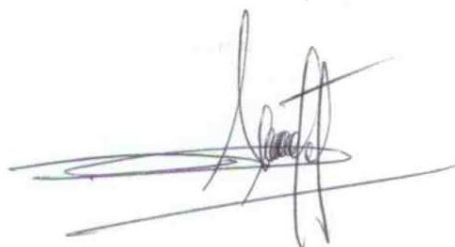

MyPHor Materiales Especiales, S.L.

Domicilio Social: c/ Cardenal Marcelo Spínola, 48. 1º A
28016 Madrid
Tel.: 91 766 39 34
Fax: 91 766 39 34

Oficina: c/ Arte, 25. 1º D
28033 Madrid
Tel.: 91 768 49 38 – 91 768 49 40
Fax: 91 384 46 18